


FLOORING

The timeless natural beauty of Tasmanian Oak floors provides a liveability and character which brings both old and new homes to life. NSFP pride themselves on the appearance and finishing qualities of their floorboards, without compromising on strength and stability. Timber floors are easy to clean, allergy friendly and keep rooms warm in winter and cool in summer.

Tasmanian Oak is light in colour, varying from straw to reddish brown with intermediate shades of cream to pink, and provides excellent staining and finishing qualities, which allow ready matching with other timbers, finishes or furnishings.

When laying floorboards directly onto floor joists or battens or over a solid sub-floor, NSFP Tasmanian Oak Uninail 19mm Flooring offers an ideal 19mm thick tongue & groove, sustainable hardwood flooring, end matched to allow jointing between joists and to reduce wastage.

Or if laying directly over a solid sub-floor, NSFP Tasmanian Oak Overlay Flooring provides a high quality 12mm thick, tongue & groove, plain-ended sustainable hardwood timber flooring product.

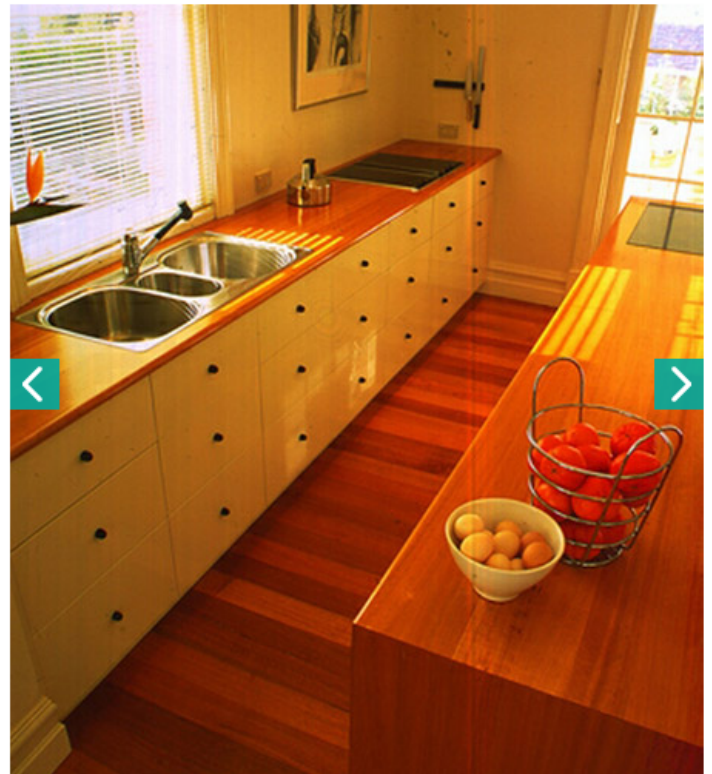

SIZES/DIMENSIONS/ GRADES/MATCHING

OVERLAY FLOORING (12MM THICK)

Size	Grade	Lengths	Matching
65 x 12 mm	Select/Prime/High Feature	0.6-2.7 m	Plain end
85 x 12 mm	Select/Prime/High Feature	0.6-2.7 m	Plain end
112 x 12 mm	Select/Prime/High Feature	0.6-2.7 m	Plain end
135 x 12 mm	Select/Prime/High Feature	0.6-2.7 m	Plain end

UNINAIL FLOORING (19MM THICK)

Size	Grade	Lengths	Matching
63 x 19 mm	Select/Prime/High Feature	0.9-5.4 m	End matched
85 x 19 mm	Select/Prime/High Feature	0.9-5.4 m	End matched
108 x 19 mm	Select/Prime/High Feature	0.9-5.4 m	End matched
133 x 19 mm	Select/Prime/High Feature	0.9-5.4 m	End matched



NSFP MOWBRAY

58 Remount Rd
Mowbray TAS 7248
phone: +61 3 6326 1181
fax: +61 3 6326 5091
admin@nevillesmithfp.com.au

NSFP SOUTHWOOD

14 Weld Rd
Lonnvale TAS 7109



Find us: facebook/nsfp

FEATURES/DESIGN ADVANTAGES

- Strong and hard,
- Stable and will not shrink or bow under normal conditions,
- Durable and long lasting,
- Easy to clean,
- Allergy and asthma friendly,
- Simple installation,
- Timeless appearance,
- Cost effective,
- Available in a wide range of grades, sizes and lengths,
- Environmentally and greenhouse friendly.
- When building, consider a raised timber ground floor, it provides: easy access to the underfloor to install or repair plumbing, heating and electrical wiring, it is easier to alter or extend than concrete slabs and it can be easily insulated against winter coolness and summer heat,

FURTHER TECHNICAL INFORMATION/ BROCHURES

For further technical information

1. [WoodSolutions Technical Guide #0 Timber Flooring – Design Guide for installation](http://www.woodsolutions.com.au/Resources/Installation-Guides)
<http://www.woodsolutions.com.au/Resources/Installation-Guides>
2. [Timber Flooring Options](#)
3. [Tasmanian Hardwood Overlay Flooring Installation Guide](#)
4. [Tasmanian Hardwood Strip Flooring on Joists Installation Guide](#)
5. [Overview Flooring Installation Guide](#)
6. [Tasmanian Oak Strip Flooring Installation as Overlay](#)
7. [Tasmanian Oak Strip Flooring Installation on Joists](#)
8. [Tasmanian Oak – Prime Grade Flooring](#)

NSFP MOWBRAY

58 Remount Rd
Mowbray TAS 7248
phone: +61 3 6326 1181
fax: +61 3 6326 5091
admin@nevillesmithfp.com.au

NSFP SOUTHWOOD

14 Weld Rd
Lonnvale TAS 7109



Find us: [facebook/nsfp](https://www.facebook.com/nsfp)